GODOX

LED RING LIGHT
LR150

Instruction Manual

Forward

Thank you for purchasing this Godox Product!
This LED Ring Light LR150 is suitable for almost all shooting occasions, which can offer lighting for live, make up, portrait shooting, video, wedding, catchlight, etc.

Features:
● Bicolor adjustment: steplessly adjust color temperature from 3000K-6000K
● Freely adjust brightness from 1% to 100%
● Included an adapter and a smartphone holder

⚠ Warning

⚠ Always keep this product dry. Do not use in rain or in damp conditions.
⚠ Do not disassemble. Should repairs become necessary, this product must be sent to an authorized maintenance center.
⚠ Keep out of reach of children.
⚠ As this product do not have waterproof function, please take measures of waterproof in rainy or damp environment.
⚠ Do not use the light in the presence of flammable gases, chemicals and other similar materials. In certain circumstance, these materials may be sensitive to the strong light emitting from this flash unit and fire or electromagnetic interference may result.

Body

01. Main Body
02. Power Switch/Brightness Adjusting Button
03. Color Temperature Adjusting Button
04. DC Power Socket
05. USB Smartphone Charging Socket
06. 1/4" Mounting Socket
07. Heat Dissipation Slot
08. Bracket Mounting Socket
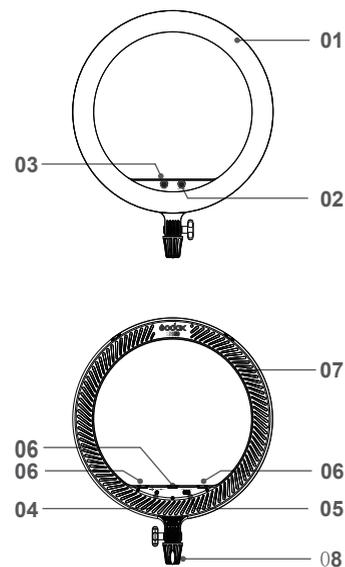
Included Items

LED ring light x1   Adapter x1   Power cable x1   Smartphone holder x1
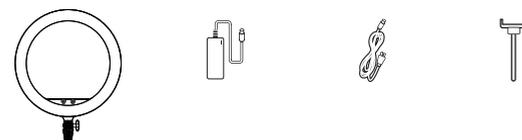
Power Management

Power Supply
DC power supply: please connect the adapter to DC power supply.
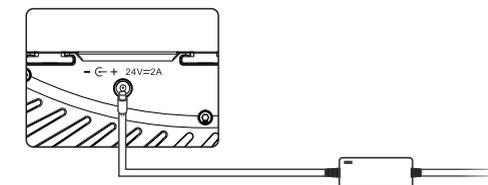
Operation

1. Before Usage
Please connect the light to DC power supply.
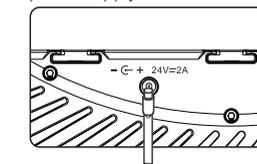
2. Power ON/OFF
Turn the power switch to power it on or off.

OFF   ON

3. Light Brightness Adjustment
Turn the brightness adjusting button to adjust brightness from 1% to 100%.

OFF   ON
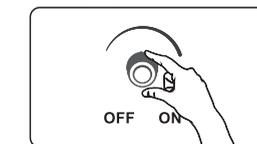
4. Color Temperature Adjustment
Turn the color temperature adjusting button to adjust color temperature from 3000K – 6000K.

COLOR

Technical Data

LED Ring Light	LR150
DC Power Supply	24V/2A
USB Power Output	5V/2A
Power	Approx. 38W
Color Temperature	3000K-6000K
100% Brightness(LUX)0.5m≈	1400
Light Brightness Range	1%~100%
CRI	> 90
TLCI	> 90
LED Beads Quantity	336
Operation Temperature	-10~40°C
Dimension	455x555x45mm
Weight	Black version: 880g
	Pink version: 870g

FC CE RoHS

705-LR1200-01

Shenzhen, China   E-mail: godox@godox.com