


合格证
QC PASS

Godox



Godox Audio Wechat
Official Account
神牛影音微信公众号



Overseas Official
Accounts & Updates
海外社媒平台及资讯

深圳市神牛摄影器材有限公司

地址：深圳市宝安区福海街道塘尾社区耀川工业园厂房2栋

电话：0755-29609320(8062) 传真：0755-25723423

邮箱：godox@godox.com

GODOX Photo Equipment Co., Ltd.

Add.: Building 2, Yaochuan Industrial Zone, Tangwei Community, Fuhai Street,
Bao'an District, Shenzhen 518103, China Tel: +86-755-29609320(8062)

Fax: +86-755-25723423 E-mail: godox@godox.com

www.godox.com

Made in China | 705-ALYNK0-01



Alink

无线麦克风

Wireless Microphone

使用手册

Instruction Manual

前言

感谢您购买神牛无线麦克风 Alink。

使用本产品之前，请仔细阅读说明书，以便正确使用。


主要特点

- 手机 / 相机 / 电脑全能兼容；
- 最远支持 300 米无线稳定传输；
- 支持单声道 / 立体声双模式收音；
- APP 内支持 10 档降噪调节（仅限安卓系统），
一键开启降噪；
- 直连电脑 UAC 开播，手机边充边直播；
- 充电盒可为接收器和发射器充电；
- 麦克风仅 6g，无感佩戴。

警告


- ⚠ 麦克风是精密设备，请勿使其掉落或受到撞击，以避免发生故障。
- ⚠ 请勿私自拆卸、改装或尝试维修本产品。
- ⚠ 产品如出现故障须由本公司或授权的维修人员进行检查维修。
- ⚠ 请勿让儿童接触本产品，以避免发生意外。
- ⚠ 请勿在易燃易爆环境中使用。
- ⚠ 请勿置于高温环境中。
- ⚠ 电池不得暴露在诸如日照，火烤或类似过热环境中。
- ⚠ 禁止拆解、撞击、挤压或投入火中。
- ⚠ 若出现严重膨胀，切勿继续使用。
- ⚠ 电池或电池组浸水后禁止使用。
- ⚠ 如果电池更换不当会有爆炸危险，只能用同样类型或等效类型的电池来更换，仅维修人员可更换，非一般人员更换。
- ⚠ 消费者若使用电源适配器充电，则应购买配套使用获得 CCC 认证并满足标准要求的电源适配器。

发射器 Alink TX

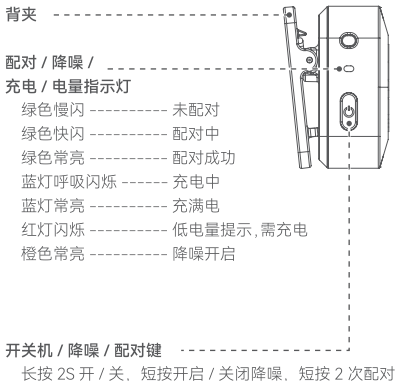


接收器 Alink RX

相机冷靴转接座



音量指示灯 / 模式指示灯

- ■ ■ 绿色亮起, 单声道
- ■ ■ 蓝色亮起, 立体声
- □ ■ 1 颗灯亮起, 1 档增益 (低)
- ■ ■ 2 颗灯亮起, 2 档增益 (中)
- ■ ■ 3 颗灯亮起, 3 档增益 (高)




TX1 指示灯

TX2 指示灯

- 绿色慢闪 ----- 未配对
- 绿色快闪 ----- 配对中
- 绿色常亮 ----- 配对成功
- 蓝灯呼吸闪烁 ----- 充电中
- 蓝灯常亮 ----- 充满电
- 红灯闪烁 ----- 低电量提示, 需充电
- 橙色常亮 ----- 降噪开启
- 橙色闪烁一次 ----- 1 档降噪 (弱降噪)
- 橙色闪烁二次 ----- 2 档降噪 (中降噪)
- 橙色闪烁三次 ----- 3 档降噪 (强降噪)

开关键 / 配对键 / 降噪键

长按 2S 开 / 关机, 短按开启 / 关闭降噪, 短按 2 次配对




模式键 / 音量键

短按 M 键, 调节增益或者降噪等级

降噪开启, 短按调节降噪等级

降噪关闭, 短按调节增益等级


长按按键 3S, 切换单声道 / 立体声模式

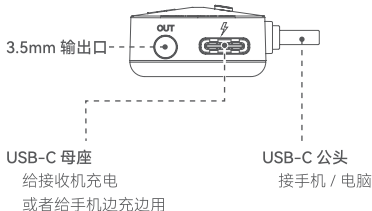

物品清单

型号	物品清单
Alink Kit1	发射器 ×1、接收器 ×1、冷靴底座 ×1、磁铁 ×1、 发射器磁吸充电座 ×1、USB-C 充电线 ×1、 TRS 转 TRS 连接线 ×1、防风兔毛 ×1、说明书 ×1
Alink Kit2	发射器 ×2、接收器 ×1、冷靴底座 ×1、 充电盒 ×1、USB-C 充电线 ×1、磁铁 ×2、 TRS 转 TRS 连接线 ×1、防风兔毛 ×2、说明书 ×1

充电盒

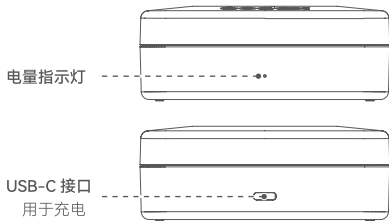

充电盒操作

- 发射器和接收器放置于充电盒内即可同时开始充电。
- 发射器 / 接收器从充电盒取出后将自动开机。
- 配合充电盒使用时，发射器与接收器总续航时间最长为 20 小时。
- 充电盒可放置两个发射器及一个接收器。

Ps: 使用前请撕掉接收器和发射器底部蓝色静电膜。

充电盒电量指示灯含义

充电时：白色闪烁


充满电：白色常亮

低电量：红色闪烁


麦克风佩戴



接收器与相机连接

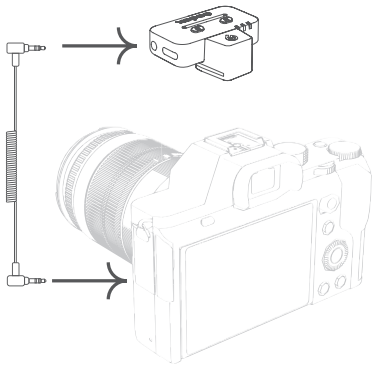


接收器与手机连接

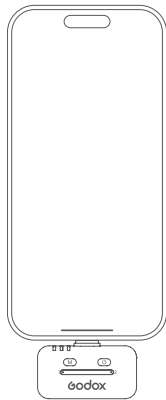

接收器与电脑连接

您可直插具备 USB-C 接口的电脑，还可另购 USB-C 母头转 USB-A 转接线连接电脑使用。

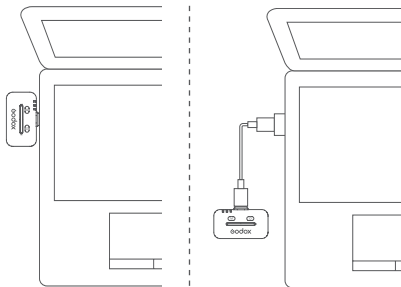

注：USB-C 母头转 USB-A 转接线需另购。

APP 下载

扫码下载 Godox Mic APP。



注：仅支持安卓版本使用

规格参数

名称	充电盒
型号	Alink Charging Case
Type-C 输入参数	5V $\overline{\text{---}}$ 0.9A
输出参数	5V $\overline{\text{---}}$ 0.2, 5V $\overline{\text{---}}$ 0.1A(*2)
总输出参数	5V $\overline{\text{---}}$ 0.4A
锂电池参数	3.7V, 800mAh, 2.96Wh
续航时间	可为两台发射器 + 一台接收器充电一次
充电时间	约 1.5h
工作环境温度	-10~50°C
充电温度	0°C ~45°C
尺寸	42.8mm×94.8mm×35.8mm
净重	约 79g

名称	发射器	接收器
型号	Alink TX	Alink RX
传输类型	2.4GHz 数字跳频系统	
拾音模式	全向型	/
频率范围	20Hz~20KHz	
最大 SPL	115dB SLP	
信噪比	> 70dB	
最大无线距离	300 米 (视距)	
输入参数	5V $\equiv$ 70mA	20V $\equiv$ 3A (Max.)
锂电池参数	3.87V, 97mAh, 0.376Wh	3.7V, 140mAh, 0.518Wh
续航时间	约 10h	约 10h
充电时间	约 1.5h	约 1.5h
工作环境温度	-10~50°C	
充电温度	0°C ~45°C	
尺寸	27.7mm ×18.8mm ×17.3mm	35.7mm ×41.8mm ×19.35mm (含转接件)
净重	约 6g	约 13g

规格和参数如有变更，恕不另行通知。

Foreword

Thank you for purchasing!

Please read this manual carefully before using to make sure the correct operation and exert the optimum function.

Main Features

- Universal compatibility with mobile phones, cameras and computers.
- Max 300m stable wireless transmission.
- Supports mono and stereo dual-sound track.
- 10 levels of noise cancellation adjustment in Android app with one-key activation.
- Receiver supports computer UAC function, use and charge at the same time.
- Charging case can charge two transmitters and one receiver simultaneously.
- Transmitter weighs merely 6g.

Warning

- ⚠ This product is high-precision instrument, please avoid falling, collision or pounding.
- ⚠ Do not disassemble, modify, or attempt to repair this product without permission.
- ⚠ Should repairs become necessary, this product must be sent to our Company or an authorized maintenance center.
- ⚠ Keep out of reach of children.
- ⚠ Do not use in flammable and explosive environments.
- ⚠ Do not expose to high-temperature environments.
- ⚠ Battery must not be exposed to sunlight, fire, or similar overheating conditions.
- ⚠ Do not disassemble, strike, crush, or expose to fire.
- ⚠ If severe swelling occurs, discontinue use immediately.
- ⚠ Do not use the battery or battery pack after immersion in water.

- ⚠ Danger of explosion if the battery is not replaced properly, danger of fire or explosion if replaced with the wrong type of battery pack, replace only with battery of the same type or equivalent. Replace by service personnel only, not general personnel.

Names of Parts

Transmitter Alink TX

Back Clip

Pairing/Noise Cancellation/

Charging/Battery Level Indicator

Flash green slowly ----- Unpaired

Flash green rapidly ----- Pairing

Constant on green ----- Paired

Breathe blue ----- Charging


Constant on blue ----- Fully charged

Flash red ----- Low battery level,
please charge

Constant on orange --- Noise cancellation on


Power Switch/Noise Cancellation/Pairing Button

Press and hold for 2s to turn on/off, press once to turn
on/off noise cancellation, press twice to start pairing




Receiver Alink RX

Camera Cold Shoe Adapter Holder

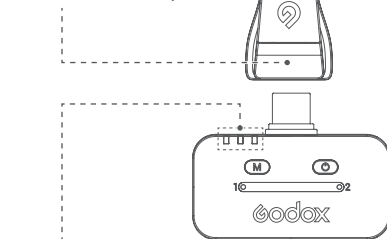

Volume/Mode Indicators

- ■ ■ Constant on green ----- Mono
- ■ ■ Constant on blue ----- Stereo
- ■ ■ One indicator lights up --- Level 1 gain (Low)
- ■ ■ Two indicators light up ----- Level 2 gain (Medium)
- ■ ■ Three indicators light up --- Level 3 gain (High)




TX1 Indicator

Flash green slowly	Unpaired
Flash green rapidly	Pairing
Constant on green	Paired
Breathe blue	Charging
Constant on blue	Fully charged
Flash red	Low battery, please charge
Constant on orange	Noise cancellation on
Flash orange once	Level 1 gain (Low)
Flash orange twice	Level 2 gain (Medium)
Flash orange three times	Level 3 gain (High)

TX2 Indicator

Power Switch/Pairing/Noise Cancellation Button

Press and hold for 2s to power on/off, press once to turn on/off noise cancellation, press twice to start pairing




Mode/Volume Button

Press the M button to adjust gain or noise cancellation level.

When the noise cancellation is on, press to adjust the level of noise cancellation.

When the noise cancellation is off, press to adjust the level of gain.


Press and hold for 3s to switch between mono and stereo modes.

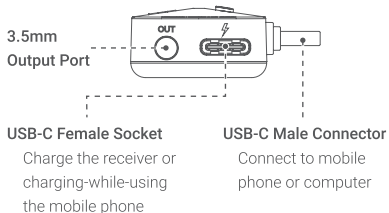

Warning

Model	Item List
Alink Kit1	Transmitter×1, Receiver×1, Cold Shoe Mount×1, Transmitter Magnetic Charging Basex1, USB-C Charging Cable×1, TRS to TRS Connecting Cable×1, Magnet×1, Furry Windscreen×1, Instruction Manual×1
Alink Kit2	Transmitter×2, Receiver×1, Cold Shoe Mount×1, Charging Casex1, USB-C Charging Cable×1, TRS to TRS Connecting Cable×1, Magnet×2, Furry Windscreen×2, Instruction Manual×1

Alink Charging Case

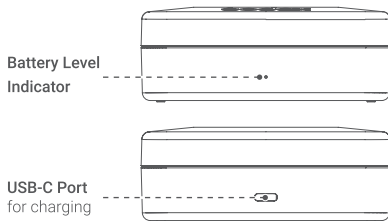

Using Instructions of the Charging Case

- Once the transmitter and receiver are inserted in, the charging case will start charging them simultaneously.
- Take the transmitter and receiver out of the charging case, they will automatically power on.

- The total battery life of the transmitter and receiver will be 20 hours when collocating with the charging case.
- The charging case can store and charge two transmitters and one receiver at the same time.

PS: Remove the blue static film from the bottom of the receiver and transmitter before use.

Indicator Instructions of the Charging Case

Charging: Flash white


Fully charged: Constant on white

Low battery level: Flash red


Transmitter Installation



Connect the Receiver to the Camera

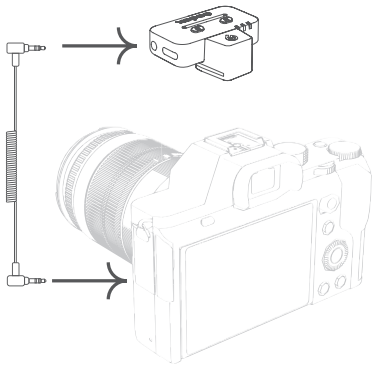


Connect the Receiver to the Mobile Phone

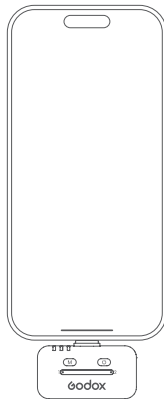

Connect the Receiver to the Computer

Insert the receiver directly into the computer with USB-C port, or connect to other computers with the separately purchased USB-C female to USB-A adapter cable.

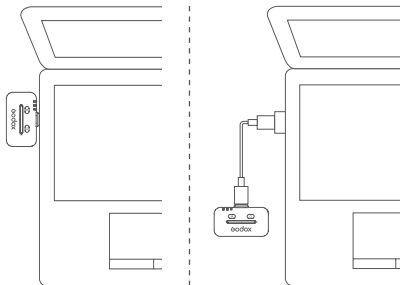

Note: The USB-C female to USB-A adapter cable is sold separately.

APP Downloading

Scan the QR code to download Godox Mic app.

Note: Only available for Android systems.



Technical Data

Product Name	Charging Case
Model	Alink Charging Case
USB-C Input Parameters	5V $\equiv$ 0.9A
Output	5V $\equiv$ 0.2, 5V $\equiv$ 0.1A(*2)
Total Output	5V $\equiv$ 0.4A
Lithium Battery Parameters	3.7V, 800mAh, 2.96Wh
Battery Life	Charge two transmitters and one receiver once
Charging Time	Approx. 1.5h
Working Environment Temperature	-10~50°C
Charging Temperature	0°C ~45°C
Dimension	1.69"×3.73"×1.41"
Net Weight	Approx. 79g

Product Name	Transmitter	Receiver
Model	Alink TX	Alink RX
Transmission Type	2.4GHz Frequency Hopping System	
Pickup Pattern	Omnidirectional	/
Frequency Range	20Hz~20KHz	
Max. SPL	115dB SLP	
SNR	> 70dB	/
Max. Wireless Distance	300m (sight distance)	
Input Parameters	5V $\equiv$ 70mA	
Lithium Battery Parameters	3.87V, 97mAh, 0.376Wh	3.7V, 140mAh, 0.518Wh
Battery Life	Approx. 10h	Approx. 10h
Charging Time	Approx. 1.5h	Approx. 1.5h
Working Environment Temperature	-10~50°C	
Charging Temperature	0°C ~45°C	
Dimension	1.09"×0.74"×0.68"	1.41"×1.65"×0.76" (with adapter)
Net Weight	Approx. 6g	Approx. 13g

Specifications and data may subject to changes without notice.

Marking Information

Model: Alink RX

Li-ion Battery: 3.7V, 140mAh, 0.518Wh
 Input: 20V $\equiv$ 3A (Max.)
 Made in China

IC: 20034-152
 FCC ID: 2ABYN152
 CAN ICES-003(B)/NMB-003(B)



R-R-gdx-094



220-J10425



Model: Alink TX

Li-ion Battery: 3.87V, 97mAh, 0.376Wh
 Input: 5V $\equiv$ 70mA
 Made in China

IC: 20034-153
 FCC ID: 2ABYN153
 CAN ICES-003(B)/NMB-003(B)



R-R-gdx-094



220-J10424



Warning

Operating frequency: 2402MHz – 2480MHz

Alink TX Maximum EIRP Power: 5dBm

Alink RX Maximum EIRP Power: 5dBm

Declaration of Conformity

GODOX Photo Equipment Co., Ltd. hereby declares that this equipment are in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. In accordance with Article 10(2) and Article 10(10), this product is allowed to be used in all EU member states.

For more information of DoC, Please click this web link:

<https://www.godox.com/eu-declaration-of-conformity>

The device complies with RF specifications when the device used at 0mm from your body

FCC Statement

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful

interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

IC Warning

This device complies with Innovation, Science and Economic Development Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference, and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Cet appareil est conforme aux normes RSS exemptées de licence d'Innovation, Sciences et Développement économique Canada. L'exploitation est soumise aux deux conditions suivantes:

- (1) Cet appareil ne peut pas causer d'interférences, et
- (2) Cet appareil doit accepter toute interférence, y compris celles qui pourraient entraîner un fonctionnement accidentel de l'appareil.

Any Changes or modifications not expressly approved

by the party responsible for compliance could void the user's authority to operate the equipment.

Tout changement ou modification non expressément approuvé par la partie responsable de la réglementation de l'OCDE peut faire perdre à l'utilisateur le droit d'utiliser l'appareil.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off

and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Remarque: cet appareil a été testé pour répondre aux limites des appareils numériques de classe B conformément à la partie 15 des règles de la Federal Communications Commission des États - Unis. Ces limites sont conçues pour fournir une protection raisonnable contre les interférences nuisibles dans les installations résidentielles. L'appareil génère de l'énergie RF utilisée et rayonne, ce qui peut causer des interférences nocives pour les communications radio s'il n'est pas installé et utilisé conformément aux

instructions. Cependant, aucunGarantie contre les interférences dans une installation spécifique.

Si l'appareil cause des interférences nuisibles à la réception de la radio ou de la télévision, qui peuvent être déterminées en éteignant et en allumant l'appareil, l'utilisateur est encouragé à tenter de corriger les interférences par une ou plusieurs des mesures suivantes:

- redirection ou repositionnement de l'antenne de réception.
- augmenter l'espacement entre l'appareil et le récepteur.
- Connecter l'appareil à une prise sur un circuit différent de celui auquel le récepteur est connecté.
- consultez votre revendeur ou un technicien radio / tv expérimenté pour obtenir de l'aide.

RF warning for Portable device:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Avertissement RF pour les appareils portables:

L'appareil a été évalué pour répondre aux exigences générales d'exposition aux radiofréquences. ÉquipementPeut être utilisé sans restriction dans des conditions d'exposition portables.

产品保修

尊敬的用户，本保修卡是申请保修服务的重要凭证，请您配合销售商填写并妥善保管，谢谢！

产品信息	型号	产品条码
用户信息	姓名	联系电话
	通讯地址	
销售商信息	名称	
	联系电话	
	通讯地址	
	销售日期	
备注		

注：此表应由销售商盖章确认。

产品信息

产品及部件的相应保修期按相关的《产品保修信息》执行。保修期自产品首次购买日起算，购买日以购买产品时保修卡登记日期为准。

保修期

本文件适用于相关《产品保修信息》（见后面说明）所列产品，其他非属此范围的产品或部件（如促销品、赠品及其他出厂后附加的部件等）不在此保修承诺内。

如何获得保修服务

要保修服务，您可直接与产品销售商或授权服务机构联系，也可拨打神牛产品售后服务电话，与我们联系，由我们的服务人员为您安排服务。申请保修时，您应提供有效的保修卡作为保修凭证，方可获得保修。如您不能提供有效的保修卡，则在我们可确认产品或部件属于保修范围的情况下，也可以为您提供保修，但这不作为我们的义务。

不适用保修的情况

如产品存在下列情况，本文件项下的保证和服务将不适用①产品或部件超过相应保修期；②错误或不当使用、维护或保管导致的故障或损坏，如：不当搬运；非按产品合理预期用途使用；不当插拔外接设备；跌落或外力挤压；接触或暴露于不当温度、溶剂、酸碱、水浸或潮湿环境；③由非神牛授权机构或人员安装、修理、更改、添加或拆卸造成的故障或损坏；④产品或部件原有识别信息被修改变更或删除；⑤无有效保修卡；⑥使用非合法授权、非标准或非公开发行的软件造成的故障或损坏；⑦因不可抗力或意外事件造成的故障或损坏；⑧其他非因产品本身质量问题导致的故障或损坏。遇上述情况，您应向相关责任方寻求解决，神牛对此不承担任何责任。因非在保修期或保修范围内的部件、附件或软件导致产品不能正常使用的，不是保修范围内的故障。产品使用过程中正常的脱色，磨损和消耗，不是保修范围内的故障。

产品保修和服务支持信息

产品的保修期和服务类型按以下《产品保修信息》执行：

产品类型	选件名称	保修期(月)	保修服务类型
部件	主机	12	客户送修
	电池	3	
	充电器等带电性能的部件	12	
其他	如电源线、同步线、电池盒、防风棉、防风毛罩、锁紧装置、手提绳、扎带、魔术贴、领夹、便携袋、包装等	无	无保修

神牛产品售后服务电话 0755-29609320-8062

有害物质标识

弃置本产品时，请不要将其与一般生活垃圾放在一起，应将其交给政府指定的回收中心有利于环保。

电子电气产品有害物质申明						
部件名称	铅 (Pb)	镉 (Cd)	汞(Hg)	六价铬 (Cr6+)	多溴联苯 (PBB)	多溴二 苯醚 (PBDE)
外壳	○	○	○	○	○	○
电路板组件*	×	○	○	○	○	○
电池组	○	○	○	○	○	○
其他配件	○	○	○	○	○	○

本表格依据 SJ/T11364 的规定编制。
 *：电路板组件包括印刷电路板及其构成的零部件，如电阻、电容、集成电路、连接器等。
 ○：表示该有毒有害物质在该部件所有均质材料中的含量在 GB/T 26572 规定的限量要求以内。
 ×：表示该有毒有害物质至少在该部件的某一均质材料中含量超出 GB/T26572 规定的限量要求。
 上表中打 × 的部件，由于技术原因目前无法实现替代，今后随着技术进步，将实现替代或改进。



在本说明书所述的正常使用条件下，本仪器的环保使用期限为 10 年，在环保使用期内可以放心使用，超过环保使用期限之后则应该进入回收循环系统。

Warranty

Dear customers, as this warranty card is an important certificate to apply for our maintenance service, please fill in the following form in coordination with the seller and safe-keep it. Thank you!

Product Information	Model	Product Code Number
Customer Information	Name	Contact Number
	Address	
Seller Information	Name	
	Contact Number	
	Address	
	Date of Sale	
Note		

Note: This form shall be sealed by the seller.

Applicable Products

The document applies to the products listed on the Product Maintenance information (see below for further information). Other products or accessories (e.g. promotional items, giveaways and additional accessories attached, etc.) are not included in this warranty scope.

Warranty Period

The warranty period of products and accessories is implemented according to the relevant Product Maintenance Information. The warranty period is calculated from the day (purchase date) when the product is bought for the first time, and the purchase date is considered as the date registered on the warranty card when buying the product.

How to Get the Maintenance Service

If maintenance service is needed, you can directly contact the product distributor or authorized service institutions. You can also contact the Godox after-sale service call and we will offer you service. When applying for maintenance service, you should provide valid warranty card. If you cannot provide valid warranty card, we may offer you maintenance service once confirmed that the product or accessory is involved in the maintenance scope, but that shall not be considered as our obligation.

Inapplicable Cases

The guarantee and service offered by this document are not applicable in the following cases: ①. **The product or accessory has expired its warranty period;** ②. **Breakage or damage caused by inappropriate usage, maintenance or preservation, such as improper packing, improper usage, improper plugging in/out external equipment, falling off or squeezing by external force,**

contacting or exposing to the improper temperature, solvent, acid, base, flooding and damp environments, etc; ③. Breakage or damage caused by non-authorized institution or staff in the process of installation, maintenance, alternation, addition and detachment; ④. The original identifying information of product or accessory is modified, alternated, or removed; ⑤. No valid warranty card; ⑥. Breakage or damage caused by using illegally authorized, nonstandard or non-public released software; ⑦. Breakage or damage caused by force majeure or accident; ⑧. Breakage or damage that could not be attributed to the product itself. Once met these situations above, you should seek solutions from the related responsible parties and Godox assumes no responsibility. The damage caused by parts, accessories and software that beyond the warranty period or scope is not included in our maintenance scope. The normal discoloration, abrasion and consumption are not the breakage within the maintenance scope.

Maintenance and Service Support Information

The warranty period and service types of products are implemented according to the following Product Maintenance Information:

Product Type	Name	Maintenance Period(month)	Warranty Service Type
Parts	Product Main Body	12	Customer sends the product to designated site
	Battery	3	
	Charger, Electrical Parts etc.	12	
Other Items	Power Cable, Sync Cable, Battery Case, Windscreen Foam, Wind Cap, Locking Device, Lanyard, Tie, Velcro Tape, Clip, Bag, Package etc.	No	Without warranty

Godox After-sale Service Call 0755-29609320-8062