




Godox

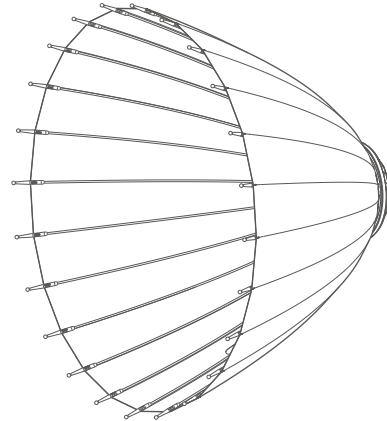

Wechat
Official Account
神牛微信公众号

深圳市神牛摄影器材有限公司

地址：深圳市宝安区福海街道塘尾社区耀川工业区厂房2栋 电话：0755-29609320(8062)
传真：0755-25723423 邮箱：godox@godox.com

GODOX Photo Equipment Co.,Ltd.

Add.: Building 2, Yaochuan Industrial Zone, Tangwei Community, Fuhai Street, Bao'an District, Shenzhen
518103, China Tel: +86-755-29609320(8062) Fax: +86-755-25723423 Email: godox@godox.com

www.godox.com

Made in China | 705-PC6800-00



Parabolic 68 Parabolic 88
Parabolic 128 Parabolic 158

抛物线反光罩
Parabolic Reflector

使用手册
Instruction Manual

前言

感谢您购买神牛产品-抛物线反光罩!

为了给专业摄影师们提供更多样化的光效, 获得更广大的创作空间, 神牛全新开发了专业级抛物线反光罩。

抛物线反光罩用途广泛, 两种使用方法满足广大摄影师的不同需求。灯头可通过链接座安装在对焦杆上, 使灯头, 对焦杆与抛物罩同轴, 灯头朝向抛物罩内反打使用, 获得更立体的塑光效果。另外, 也可以把灯头直接安装在抛物罩卡口正打使用, 抛物罩采用保荣卡口, 通用性强。

灯头(另购)搭配对焦杆使用时, 移动对焦杆的位置, 即为调整抛物罩的聚焦中轴。当您滑动对焦杆, 灯头光束角度与光的软硬强度也会产生相应变化。

- 当对焦杆伸出对焦杆0刻度位置, 0刻度→10刻度, 光束变窄, 获得对比强烈的立体硬光, 聚光性强。
- 当对焦杆缩回对焦10刻度位置, 10刻度→0刻度, 光束变宽, 有了更宽的光束角, 产生漫射, 获得更柔和的均匀光线, 泛光性强。

这一系列抛物线反光罩共有4个规格, 分别为Parabolic 68、Parabolic 88、Parabolic 128、Parabolic 158。

警告

在使用本产品之前, 请务必仔细阅读使用说明书。请务必妥善保管好使用说明书, 以便日后查阅。

- ⚠ 当使用把手打开或关闭抛物线反光罩时, 请控制好力度, 以免力气过大造成意外发生。
- ⚠ 选择灯头(另购)直接安装在抛物线反光罩卡口上使用, 由于抛物线反光罩较重, 使用前请合理评估, 是否能够直接安装使用。
- ⚠ 该抛物线反光罩适用于神牛H1200P灯头或H2400P灯头, 其他品牌的灯头暂不做测评, 如用其他灯体时发生意外, 本司不承担责任。
- ⚠ 将灯体安装在对焦杆链接座时, 建议先将灯体安装在对焦杆连接座上, 最后才安装在抛物罩对焦杆上。

- ▲ 在使用本产品之前, 请务必仔细阅读使用说明书。请务必妥善保管好使用说明书, 以便查阅。

物品清单

| 名称 | 物品 |
|---------------------|---|
| 抛物线反光罩Parabolic 68 | 抛物线反光罩Parabolic68*1、把手PB-G1 *1、箱包CB35 *1 |
| 抛物线反光罩Parabolic 88 | 抛物线反光罩Parabolic88*1、把手PB-G1 *1、箱包CB35 *1 |
| 抛物线反光罩Parabolic 128 | 抛物线反光罩Parabolic128*1、把手PB-G1 *1、箱包CB35 *1 |
| 抛物线反光罩Parabolic 158 | 抛物线反光罩Parabolic158*1、把手PB-G1 *1、箱包CB36 *1 |
| 抛物线反光罩P68 Kit | 抛物线反光罩Parabolic68*1、把手PB-G1*1、对焦杆保荣卡口卡链接座PF-BM*1、对焦杆中杆PF-R670*1、对焦杆座PF-M*1 箱包CB35 *1、防坠绳*1 |
| 抛物线反光罩P88 Kit | 抛物线反光罩Parabolic88*1、把手PB-G1*1、对焦杆保荣卡口卡链接座PF-BM*1、对焦杆中杆PF-R670*1、对焦杆座PF-M*1 箱包CB35 *1、防坠绳*1 |
| 抛物线反光罩P128 Kit | 抛物线反光罩Parabolic128*1、把手PB-G1*1、对焦杆保荣卡口卡链接座PF-BM*1、对焦杆长杆PF-R870*1、对焦杆座PF-M*1 箱包CB35 *1、防坠绳*1 |
| 抛物线反光罩P158 Kit | 抛物线反光罩Parabolic158*1、把手PB-G1*1、对焦杆保荣卡口卡链接座PF-BM*1、对焦杆长杆PF-R870*1、对焦杆座PF-M*1 箱包CB36 *1、防坠绳*1 |



对焦杆 PF-R670/PF-R870



对焦杆保荣卡口卡链接座PF-BM(净重≈0.39kg)



抛物线反光罩



对焦杆座PF-M(净重≈1.47kg)



防坠绳



箱包



把手PB-G1(净重≈0.35kg)

另购附件

柔光纱

柔光纱P68-D1
柔光纱P68-D2

柔光纱P88-D1
柔光纱P88-D2

柔光纱P128-D1
柔光纱P128-D2

柔光纱P158-D1
柔光纱P158-D2



格栅

格栅P68-LG

格栅P88-LG

格栅P128-LG

格栅P158-LG



灯架

型号: 270CS



270cm



10kg



95cm



120cm



6.3kg



型号: 240CS



237cm



10kg



95cm



130cm




6kg



使用说明



打开抛物线反光罩

先在标有红点安装口插入把手，然后一手握住一个把手，朝着相同方向用力打开，直至抛物线反光罩完全展开。



关闭抛物线反光罩

先在标有红点安装口插入把手，然后一手握住一个把手，朝着相同方向用力打开，直至抛物线反光罩完全展开。



规格参数

| Parabolic68套装物品 | 相关信息 |
|-----------------|---------------|
| 套装型号 | P68 Kit |
| 抛物线反光罩型号 | Parabolic 68 |
| 抛物线反光罩伞骨数量 | 24根 |
| 抛物线反光罩打开状态 | 直径700*730mm |
| 抛物线反光罩净重 | 2.93kg |
| 柔光纱 | 直径700mm |
| 格栅 | 直径700mm |
| 箱包CB35净重 | ≈6.35kg |
| 对焦杆中杆PF-R670 | φ35.0*728.1mm |
| 对焦杆中杆PF-R670净重 | ≈0.38kg |
| Parabolic68套装物品 | ≈13kg |

| Parabolic88套装物品 | 相关信息 |
|-----------------|---------------|
| 套装型号 | P88 Kit |
| 抛物线反光罩型号 | Parabolic88 |
| 抛物线反光罩伞骨数量 | 24根 |
| 抛物线反光罩打开状态 | 直径900*660mm |
| 抛物线反光罩净重 | 2.99kg |
| 柔光纱 | 直径900mm |
| 格栅 | 直径900mm |
| 箱包CB35净重 | ≈6.35kg |
| 对焦杆中杆PF-R670 | φ35.0*728.1mm |
| 对焦杆中杆PF-R670净重 | ≈0.38kg |
| Parabolic88套装物品 | ≈13kg |

规格参数

| Parabolic128套装物品 | 相关信息 |
|------------------|---------------|
| 套装型号 | P128 Kit |
| 抛物线反光罩型号 | Parabolic128 |
| 抛物线反光罩伞骨数量 | 24根 |
| 抛物线反光罩打开状态 | 直径1200*720mm |
| 抛物线反光罩净重 | 3.22kg |
| 柔光纱 | 直径1200mm |
| 格栅 | 直径1200mm |
| 箱包CB35净重 | ≈6.35kg |
| 对焦杆长杆PF-R870 | φ35.0*928.1mm |
| 对焦杆中杆PF-R870净重 | ≈0.45kg |
| Parabolic128套装物品 | ≈13.3kg |

| Parabolic158套装物品 | 相关信息 |
|------------------|----------------|
| 套装型号 | P158 Kit |
| 抛物线反光罩型号 | Parabolic158 |
| 抛物线反光罩伞骨数量 | 24根 |
| 抛物线反光罩打开状态 | 直径1500mm*820mm |
| 抛物线反光罩净重 | 3.78kg |
| 柔光纱 | 直径1500mm |
| 格栅 | 直径1500mm |
| 箱包CB36净重 | ≈6.5kg |
| 对焦杆长杆PF-R870 | φ35.0*928.1mm |
| 对焦杆中杆PF-R870净重 | ≈0.45kg |
| Parabolic158套装物品 | ≈14.6kg |

Foreword

Thank you for purchasing!

The Parabolic Reflector series is designed to create various light effects for the creation of professional photographers.

There are two ways of application for the lamp head and Parabolic Reflector. Fix the lamp head on the focusing rod through the strobe adapter to make them on the same axis with the Parabolic Reflector. The lamp head is mounted against the Parabolic Reflector; fix the lamp head on the Bowens mount. The lamp head is mounted to the same direction of the Parabolic Reflector. The Bowens mount of the Parabolic Reflector makes it more compatible and versatile.

When the lamp head (optional) collocates with the focusing rod, with the movement of the focusing rod, the focusing axis of the Parabolic Reflector is adjusted, the angle and intensity of the light will also change accordingly.

When the lamp head (optional) collocates with the focusing rod:

As the focusing rod extends from 0 to 10 degree, the light beam narrows and intensifies, with a contrastive and stereo lighting.

As the focusing rod retracts from 10 to 0 degree, the light beam widens and weakens, with a soft and even lighting.

The Parabolic Reflector series has 4 products: Parabolic 68, Parabolic 88, Parabolic 128 and Parabolic 158.

Warning

- ⚠ Please gently use the handle to open or close the Parabolic Reflector to avoid accidents or damages.
- ⚠ As the Parabolic Reflector is heavy, please make a reasonable assessment before directly installing lamp head (optional) to the mount of the Parabolic Reflector.
- ⚠ The Parabolic Reflector is suitable for Godox H1200P or H2400P. We take no responsibility for any accident by using lights of other brands which we have not tested.
- ⚠ When collocating with the focusing rod, please fix on the strobe adapter of focusing rod before attaching to the Parabolic Reflector.
- ⚠ Before using this product:
Please read this user manual carefully in order to ensure your safety and the proper operation of this product. Keep for future reference.

Included Items

| Product Name | Included Items |
|--------------|--|
| Parabolic68 | Parabolic68*1, Handle PB-G1*1, Carry Bag CB35*1 |
| Parabolic88 | Parabolic88*1, Handle PB-G1*1, Carry Bag CB35*1 |
| Parabolic128 | Parabolic128*1, Handle PB-G1*1, Carry Bag CB35*1 |
| Parabolic158 | Parabolic158*1, Handle PB-G1*1, Carry Bag CB36*1 |
| P68 Kit | Parabolic68*1, Handle PB-G1*1, Strobe Adapter for Bowens Mount PF-BM*1, Focusing Rod PF-R670*1, Focusing Mount PF-M*1, Carry Bag CB35*1, Fall Arrest Rope*1 |
| P88 Kit | Parabolic88*1, Handle PB-G1*1, Strobe Adapter for Bowens Mount PF-BM*1, Focusing Rod PF-R670*1, Focusing Mount PF-M*1, Carry Bag CB35*1, Fall Arrest Rope*1 |
| P128 Kit | Parabolic128*1, Handle PB-G1*1, Strobe Adapter for Bowens Mount PF-BM*1, Focusing Rod PF-R870*1, Focusing Mount PF-M*1, Carry Bag CB35*1, Fall Arrest Rope*1 |
| P158 Kit | Parabolic158*1, Handle PB-G1*1, Strobe Adapter for Bowens Mount PF-BM*1, Focusing Rod PF-R870*1, Focusing Mount PF-M*1, Carry Bag CB36*1, Fall Arrest Rope*1 |



Separately Sold Accessories

Diffuser

Diffuser P68-D1
Diffuser P68-D2

Diffuser P88-D1
Diffuser P88-D2

Diffuser P128-D1
Diffuser P128-D2

Diffuser P158-D1
Diffuser P158-D2



Light Grid

Light Grid P68-LG
Light Grid P88-LG
Light Grid P128-LG
Light Grid P158-LG



Light Stand

Model: 270CS



270cm



10kg



95cm



120cm



6.3kg

Model: 240CS



237cm



10kg




95cm



Instructions for use

Open the Parabolic Reflector

Insert the handles into the red dotted mounts, then hold a handle with each hand and push them in the same direction until the Parabolic Reflector is fully unfolded.

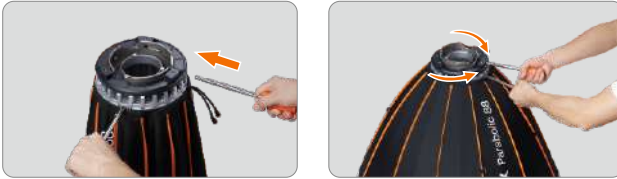

Close the Parabolic Reflector

Insert the handles into the red dotted mounts, then hold a handle with each hand and push them in the opposite direction until the Parabolic Reflector is closed.



Technical Data

| Parabolic68 Kit | Relevant Information |
|------------------------------------|----------------------|
| Kit Model | P68 Kit |
| Parabolic Reflector Model | Parabolic68 |
| Number of Rods | 24 |
| Dimension in Open Status | Diameter 700*730mm |
| Net Weight of Parabolic Reflector | 2.93kg |
| Dimension of Diffuser | Diameter 700mm |
| Dimension of Light Grid | Diameter 700mm |
| Net Weight of Carry Bag CB35 | ≈ 6.35kg |
| Dimension of Focusing Rod PF-R670 | φ35.0*728.1mm |
| Net Weight of Focusing Rod PF-R670 | ≈ 0.38kg |
| Weight of Parabolic68 Kit | ≈ 13kg |

| Parabolic88 Kit | Relevant Information |
|------------------------------------|----------------------|
| Kit Model | P88 Kit |
| Parabolic Reflector Model | Parabolic88 |
| Number of Rods | 24 |
| Dimension in Open Status | Diameter 900*660mm |
| Net Weight of Parabolic Reflector | 2.99kg |
| Dimension of Diffuser | Diameter 900mm |
| Dimension of Light Grid | Diameter 900mm |
| Net Weight of Carry Bag CB35 | ≈ 6.35kg |
| Dimension of Focusing Rod PF-R670 | φ35.0*728.1mm |
| Net Weight of Focusing Rod PF-R670 | ≈ 0.38kg |
| Weight of Parabolic88 Kit | ≈ 13kg |

Technical Data

| Parabolic128 Kit | Relevant Information |
|------------------------------------|-----------------------------|
| Kit Model | P128 Kit |
| Parabolic Reflector Model | Parabolic128 |
| Number of Rods | 24 |
| Dimension in Open Status | Diameter 1200*720mm |
| Net Weight of Parabolic Reflector | 3.22kg |
| Dimension of Diffuser | Diameter 1200mm |
| Dimension of Light Grid | Diameter 1200mm |
| Net Weight of Carry Bag CB35 | ≈ 6.35kg |
| Dimension of Focusing Rod PF-R870 | φ35.0*928.1mm |
| Net Weight of Focusing Rod PF-R870 | ≈ 0.45kg |
| Weight of Parabolic128 Kit | ≈ 13.3kg |

| Parabolic158 Kit | Relevant Information |
|------------------------------------|-----------------------------|
| Kit Model | P158 Kit |
| Parabolic Reflector Model | Parabolic158 |
| Number of Rods | 24 |
| Dimension in Open Status | Diameter 1500*820mm |
| Net Weight of Parabolic Reflector | 3.78kg |
| Dimension of Diffuser | Diameter 1500mm |
| Dimension of Light Grid | Diameter 1500mm |
| Net Weight of Carry Bag CB36 | ≈ 6.5kg |
| Dimension of Focusing Rod PF-R870 | φ35.0*928.1mm |
| Net Weight of Focusing Rod PF-R870 | ≈ 0.45kg |
| Weight of Parabolic158 Kit | ≈ 14.6kg |

FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement.

The device can be used in portable exposure condition without restriction.

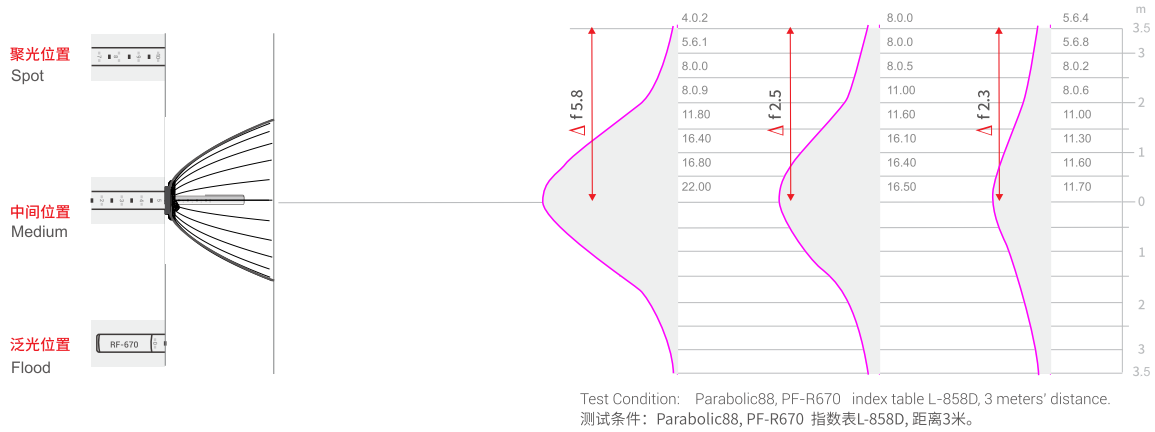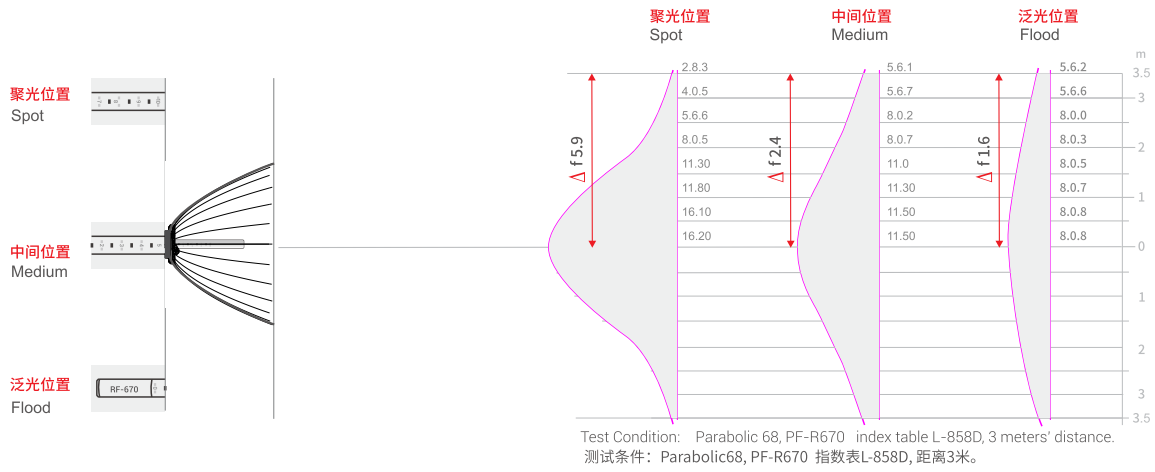

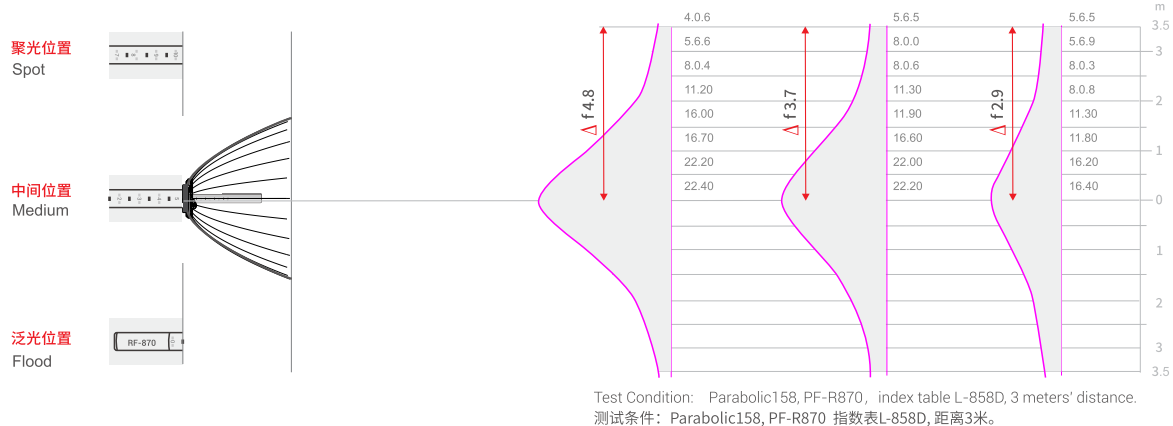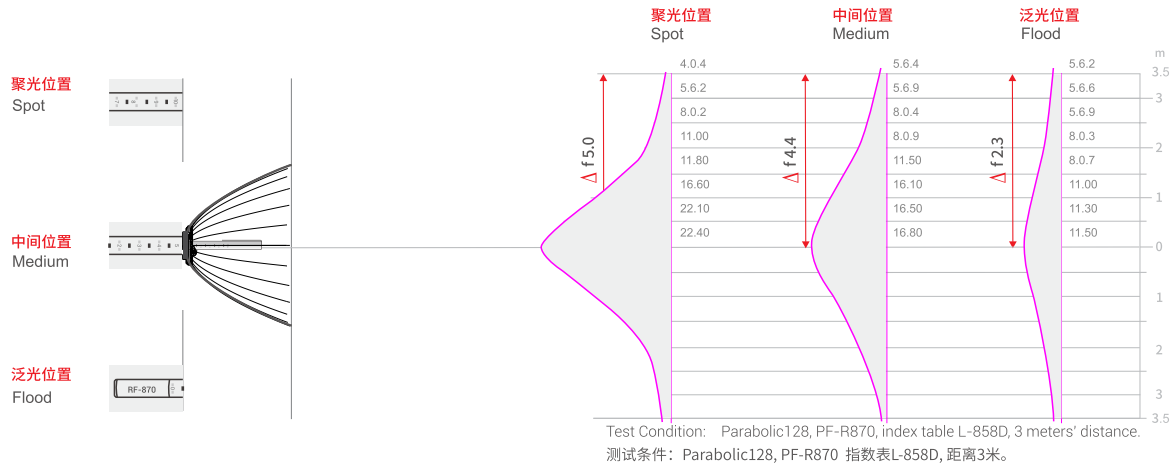

产品保修

尊敬的用户，本保修卡是申请保修服务的重要凭证，请您配合销售商填写并妥善保管，谢谢！

| | | |
|-------|------|------|
| 产品信息 | 型号 | 产品条码 |
| 用户信息 | 姓名 | 联系电话 |
| | 通信地址 | |
| 销售商信息 | 名称 | |
| | 联系电话 | |
| | 通信地址 | |
| | 销售日期 | |
| 备注 | | |

注：此表应由销售商盖章确认。

适用产品

本文件适用于相关《产品保修信息》(见后面说明)所列产品，其他非属此范围的产品或部件(如促销品、赠品及其他出厂后附加的部件等)不在此保修承诺内。

保修期

产品及部件的相应保修期按相关的《产品保修信息》执行。保修期自产品首次购买日起算，购买日以购买产品时保修卡登记日期为准。

如何获得保修服务

要保修服务，您可直接与产品销售商或授权服务机构联系，也可拨打神牛产品售后服务电话，与我们联系，由我们的服务人员为您安排服务。申请保修时，您应提供有效的保修卡作为保修凭证，方可获得保修。如您不能提供有效的保修卡，则在我们可确认产品或部件属于保修范围的情况下，也可以为您提供保修，但这不作为我们的义务。

不适用保修的情况

如产品存在下列情况，本文件项下的保证和服务将不适用 ①产品或部件超过相应保修期；②错误或不适当使用、维护或保管导致的故障或损坏，如：不当搬运；非按产品合理预期用途使用；不当插拔外接设备；跌落或外力挤压；接触或暴露于不适当温度、溶剂、酸碱、水浸或潮湿环境；③由非神牛授权机构或人员安装、修理、更改、添加或拆卸造成的故障或损坏；④产品或部件原有识别信息被修改变更或删除；⑤无有效保修卡；⑥使用非合法授权、非标准或非公开发行的软件造成的故障或损坏；⑦因不可抗力或意外事件造成的故障或损坏；⑧其他非因产品本身质量问题导致的故障或损坏。遇上述情况，您应向相关责任方寻求解决，神牛对此不承担任何责任。因非在保修期或保修范围内的部件、附件或软件导致产品不能正常使用的，不是保修范围内的故障。产品使用过程中正常的脱色，磨损和消耗，不是保修范围内的故障。

产品保修和服务支持信息

产品的保修期和服务类型按以下《产品保修信息》执行：

| 产品类别 | 选件名称 | 保修期(月) | 保修服务类型 |
|------|------------------------------------|--------|--------|
| 部件 | 电路板 | 12 | 客户送修 |
| | 电池 | 3 | 客户送修 |
| | 充电器等带电性能的部件。 | 12 | 客户送修 |
| 其他 | 如闪光灯管、造型灯泡、外壳、保护罩、锁紧装置、包装电源线，同步线等。 | 无 | 无保修 |

神牛产品售后服务电话 0755-29609320-8062

Warranty

Dear customers, as this warranty card is an important certificate to apply for our maintenance service, please fill in the following form in coordination with the seller and safe-keep it. Thank you!

| | | |
|----------------------|----------------|---------------------|
| Product Information | Model | Product Code Number |
| Customer Information | Name | Contact Number |
| | Address | |
| Seller Information | Name | |
| | Contact Number | |
| | Address | |
| | Date of Sale | |
| Note: | | |

Note: This form shall be sealed by the seller.

Applicable Products

The document applies to the products listed on the Product Maintenance Information (see below for further information). Other products or accessories (e.g. promotional items, giveaways and additional accessories attached, etc.) are not included in this warranty scope.

Warranty Period

The warranty period of products and accessories is implemented according to the relevant Product Maintenance Information. The warranty period is calculated from the day (purchase date) when the product is bought for the first time. And the purchase date is considered as the date registered on the warranty card when buying the product.

How to Get the Maintenance Service

If maintenance service is needed, you can directly contact the product distributor or authorized service institutions. You can also contact the Godox after-sale service call and we will offer you service. When applying for maintenance service, you should provide valid warranty card. If you cannot provide valid warranty card, we may offer you maintenance service once confirmed that the product or accessory is involved in the maintenance scope, but that shall not be considered as our obligation.

Inapplicable Cases

The guarantee and service offered by this document are not applicable in the following cases:
 ①. The product or accessory has expired its warranty period;
 ②. Breakage or damage caused by inappropriate usage, maintenance or preservation, such as improper packing, improper usage, improper plugging in/out external equipment, falling off or squeezing by external force, contacting or exposing to the improper temperature, solvent, acid, base, flooding and damp environments, etc;
 ③. Breakage or damage caused by non-authorized institution or staff in the process of installation, maintenance, alternation, addition and detachment;
 ④. The original identifying information of product or accessory is modified, alternated, or removed;
 ⑤. No valid warranty card;
 ⑥. Breakage or damage caused by using illegally authorized, nonstandard or non-public released software;
 ⑦. Breakage or damage caused by force majeure or accident;
 ⑧. Breakage or damage that could not be attributed to the product itself.
 Once met these situations above, you should seek solutions from the related responsible parties and Godox assumes no responsibility. The damage caused by parts, accessories and software that beyond the warranty period or scope is not included in our maintenance scope. The normal discoloration, abrasion and consumption are not the breakage within the maintenance scope.

Maintenance and Service Support Information

The warranty period and service types of products are implemented according to the following **Product Maintenance Information**:

| Product Type | Name | Maintenance Period(month) | Warranty Service Type |
|--------------|--|---------------------------|---|
| Parts | Circuit Board | 12 | Customer sends the product to designated site |
| | Battery | 3 | Customer sends the product to designated site |
| | Electrical parts e.g. battery charger, etc. | 12 | Customer sends the product to designated site |
| Other Items | Flash tube, modeling lamp, lamp body, lamp cover, locking device, package, power cord, sync cable etc. | No | Without warranty |

Godox After-sale Service Call **0755-29609320-8062**